


Pitbull[®] Non-Marring Shield Instructions

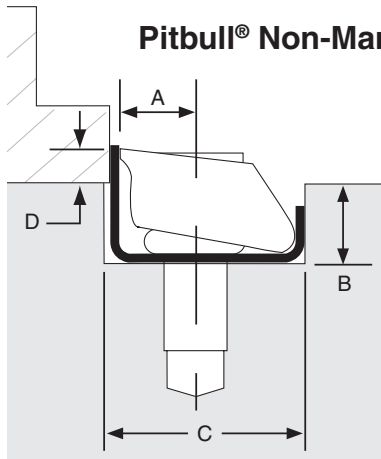

Shift **A** back .025", increase **B** .025", then open **C** fore and aft .025" to maintain working distance from hard stop.

Already built fixture:
 Must remove .025" from hard stop then open **C** and increase **B** .025" to maintain the same **D** height.

Part No.	Pitbull Part No.	Screw Size	No. Shields Per Package
26052	26060 (56060)	1/4-20 (M6)	6